

A4/A5 Installation guide



1. The original car control
(Power off before installation)



2. Pry open the main driver's side baffle



3. Remove the screws



4. Remove the bottom screw



5. Remove bottom screw and remove baffle plate



6. Remove the central control silver panel fixing screws



7. Pry open the passenger side baffle



8. Remove the screws




9. Open the glove box and remove the six holding screws



10. Remove the six holding screws



11. Remove screws on both sides of the bottom of the glove box and remove the glove box

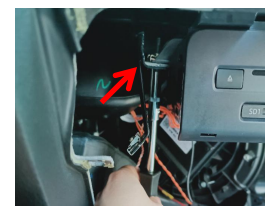

12. Remove the two fixing screws of the original engine and remove the original engine



13. Remove two screws from the silver trim plate



14. Remove the central control silver decorative board




15. Remove the five screws on the air conditioner air outlet



16. Remove the trim bar under the original screen




17. Remove the four fixing screws

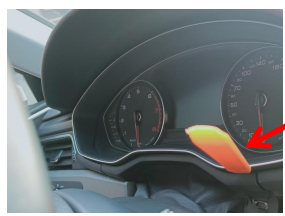

18. Pry loose the trim strip under the dashboard



19. Pry out the central air conditioning panel

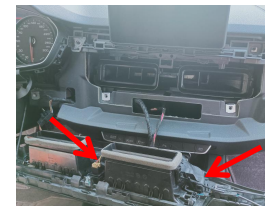

20. Remove the central air conditioner panel




21. Remove the fixing screws under the original screen




22. Use a pry knife to slightly loosen the original instrument and remove the original screen




23. Remove the original screen

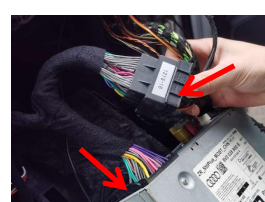


24. Connect the power cable of the original car plug

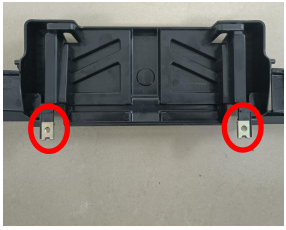

25. Install the buckle on the base

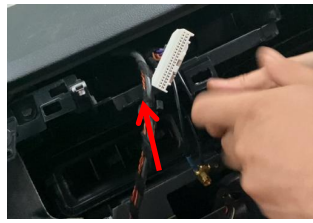


26. Install the machine base

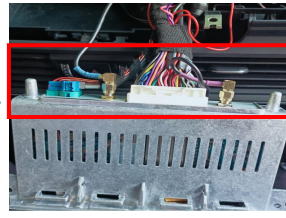

27. Plug in 4G, GPS, LVDS, power plug



28. Install left and right trim strips

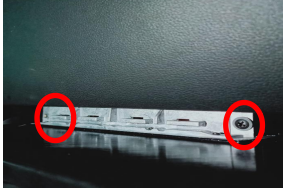

29. Secure the machine and lock the screws



30. Install top cover trim strip




31. Installation completed effect drawing

Android wire functional interface definition diagram



360 Camera power supply Front camera Rear camera

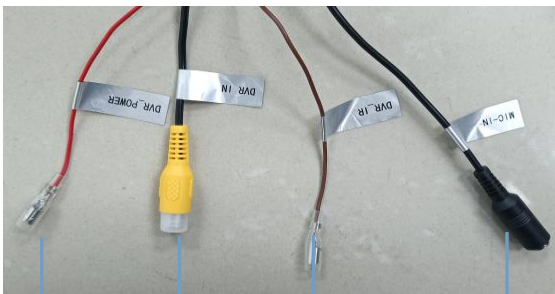

12V VBS_DVR DVR_IR External microphone



AUX USB1 SIM card USB2